
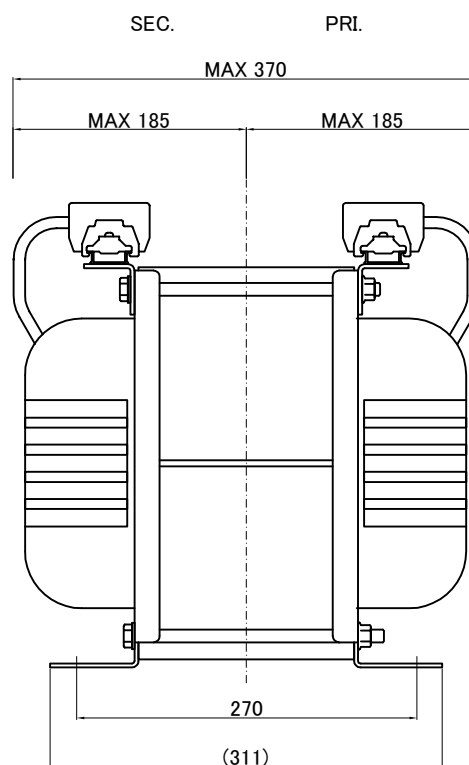
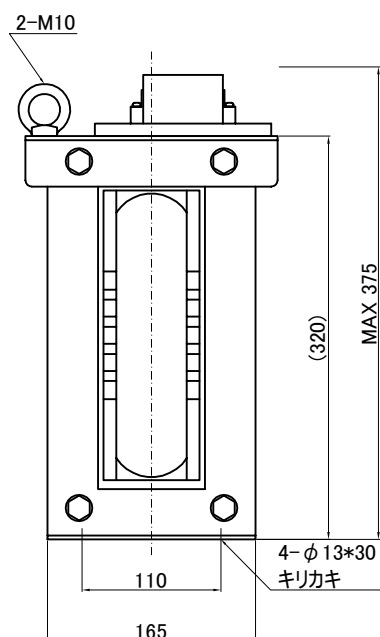
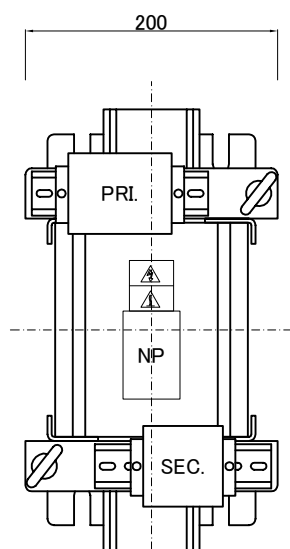


Circuit Diagram

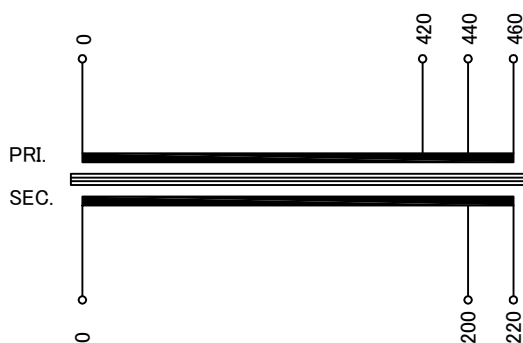

Specification

定 格 Rating	Cont.		
容 量 Capacity	10kVA		
相 数 Phase	1φ	周 波 数 Frequency	50/60Hz
一次電圧 Primary Volt	F420/R440/F460V		
二次電圧 Secondary Volt	R200/F220V		
二次電流 Secondary Curr.	50A		
耐熱クラス Class	H	質 量 Mass	56kg
絶縁抵抗 Insulation Resistance			
P-E P-S S-E			

100M Ω Min. at DC1000V

Dielectric Withstand Volt.

P-E P-S	AC 60Hz	4.0kV / 1min.
S-E	AC 60Hz	2.0kV / 1min.

Standard JEC-2200-2014 JEM 1310-2001

SEC. PT-90 3P M6 締付トルク 2.5~3.7N・m

PRI.	P			
	0	420	440	460

SEC.	S		
	0	200	220

[illegible]

今井電機株式会社

DATE 19.10.28

N. Marukai

M. Fujitaka

Dry type Isolating Transformer	
尺度 SCALE	單位 UNIT

mm

TABLE 1

MODEL

圖 霍
DWG NO.

摘要	REMARKS
----	---------

HW1-010A-72

1

SHW1010AQ72

改訂
Ver.

質量は標準仕様の値を記入しており、実測値と異なる場合もあります。