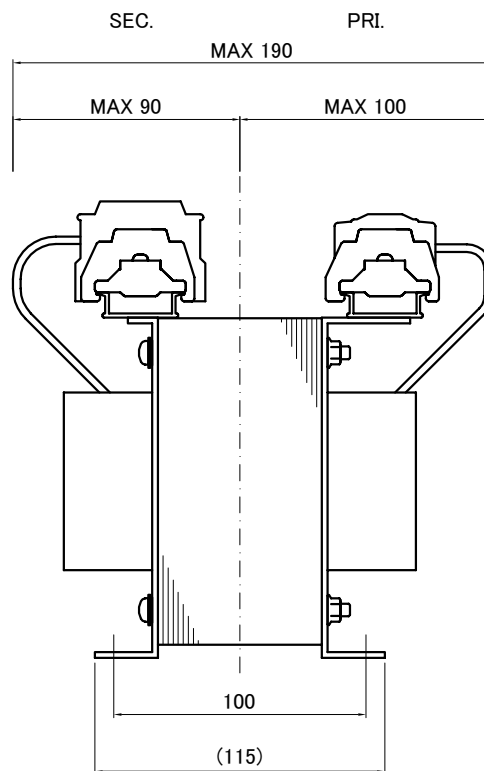
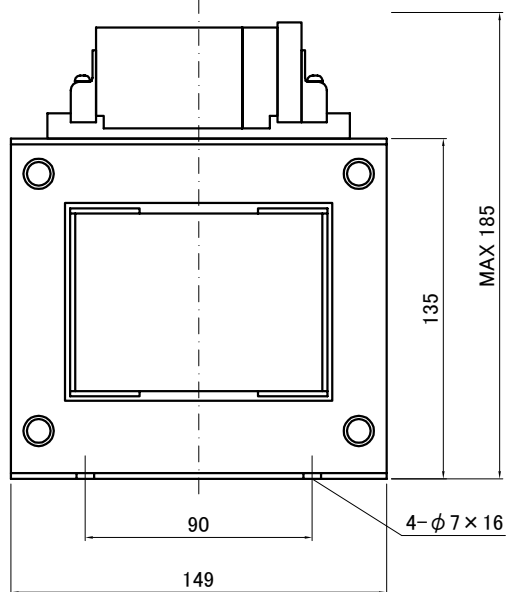
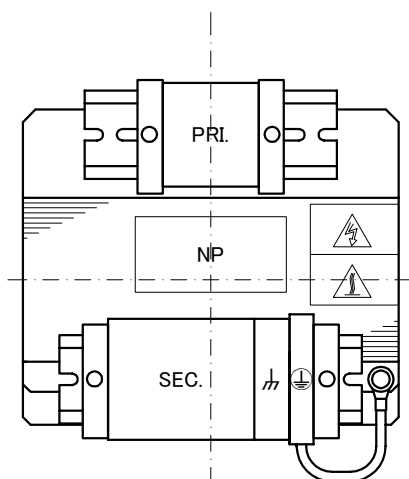


PRI.	P			
	0	200	220	240

① TFE20 1P M3.5(1.0~1.3N·m)

SEC.	S						
	0	100	110	115	120	m	

[illegible]

仕 様 Specification			
定 格 Rating	連続 Cont.		
容 量 Capacity	500VA		
相 数 Phase	1~	周波数 Frequency	50/60Hz
1次電圧 Primary Volt.	200/220/240V		
2次電圧 Secondary Volt.	100/110/115/120V		
2次電流 Secondary Curr.	5/4.55/4.35/4.17A		
絶縁抵抗 <u>Insulation Resistance</u>			
P-E P-S S-E	100MΩ Min. at DC500V		
絶縁耐圧 <u>Dielectric Withstand Volt.</u>			
P-E	AC 60Hz	2.5kV / 1min.	
P-S	AC 60Hz	4.2kV / 1min.	
S-E	AC 60Hz	2.5kV / 1min.	
トランス質量 Transformer Mass	10.5kg		
絶縁種別 Insulation Class	Class 130(B)		
定格周囲温度 Ambient Temp.	40℃		
適用規格 Standard	UL5085-1, UL5085-2 C22.2 EN61558-1, EN61558-2-4 IEC61558-1, IEC61558-2-4 BS EN IEC 63000		
ULファイルNo. UL File No.	E219074		
EN, IECマーク EN, IEC Mark	Non short circuit proof isolating transformer		
推奨保護装置定格 <u>Recommended protection device rating</u>	Pri. Circuit Breaker 5A Sec. Circuit Breaker 5A (IEC60947-2 or IEC60934)		

質量は標準仕様の値を記入しており、実測値と異なる場合もあります。



IMAI ELECTRIC

今井電機株式会社

M.Fujitaka

11/11/2016

DWG NO

IEB1-A0500S-903

	SIEB1A0500903
--	---------------

改訂 Ver.	1
------------	---