
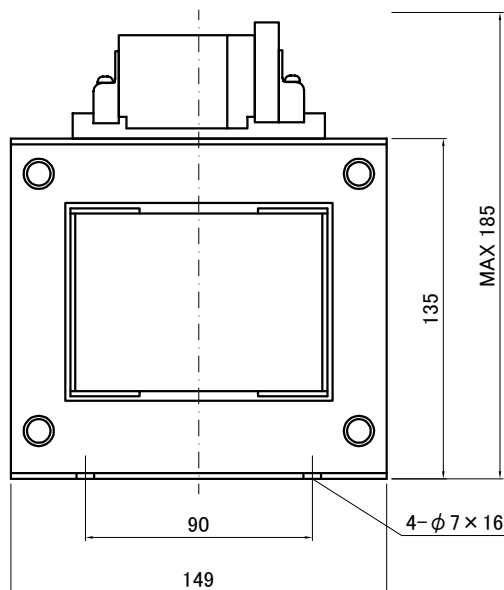



PRI.	P			
	0	380	400	440

SEC.	S						
	0	100	110	115	120	III	

① TFE20 1P M3.5(1.0~1.3N·m)

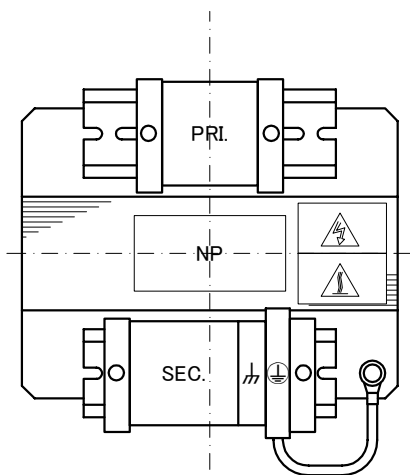

仕 様 Specification			
定 格	連続		
Rating	Cont.		
容 量	300VA		
Capacity			
相 数	1~	周波数	50/60Hz
Phase		Frequency	
1次電圧	380/400/440V		
Primary Volt.			
2次電圧	100/110/115/120V		
Secondary Volt.			
2次電流	3/2.73/2.61/2.5A		
Secondary Curr.			
絶縁抵抗			
Insulation Resistance			
P-E P-S S-E	100MΩ Min. at DC500V		
絶縁耐圧			
Dielectric Withstand Volt.			
P-E	AC 60Hz	4.0kV / 1min.	
P-S	AC 60Hz	5.0kV / 1min.	
S-E	AC 60Hz	2.5kV / 1min.	
トランス質量	7.5kg		
Transformer Mass			
絶縁種別	Class 130(B)		
Insulation Class			
定格周囲温度	40℃		
Ambient Temp.			
適用規格	UL5085-1, UL5085-2		
Standard	C22.2		
	EN61558-1, EN61558-2-4		
	IEC61558-1, IEC61558-2-4		
	BS EN IEC 63000		
ULファイルNo.	E219074		
UL File No.			
EN, IECマーク	Non short circuit proof		
EN, IEC Mark	isolating transformer		
推奨保護装置定格			
Recommended protection device rating			
	Pri. Circuit Breaker 2A		
	Sec. Circuit Breaker 3A		
	(IEC60947-2 or IEC60934)		

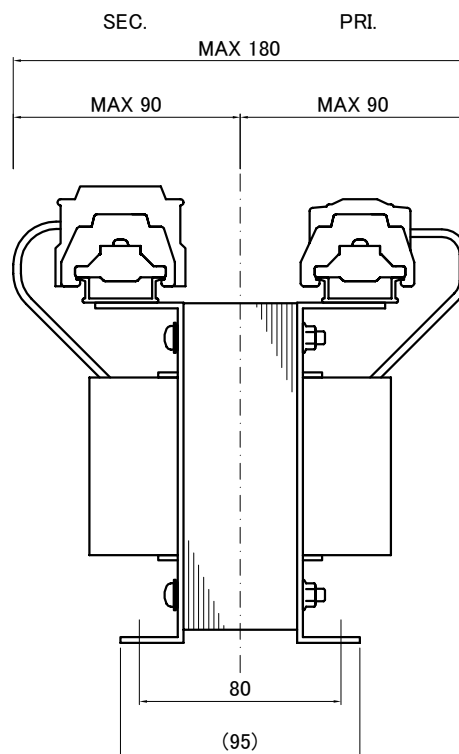

今井電機株式会社

	SIEB1B0300303
--	---------------

改訂 Ver.	1
------------	---