



PRI.

U	380	400	415	440
---	-----	-----	-----	-----

Y	380	400	415	440
---	-----	-----	-----	-----

W	380	400	415	440
---	-----	-----	-----	-----

PT-150 2P M8 (6.0~9.0N・m)

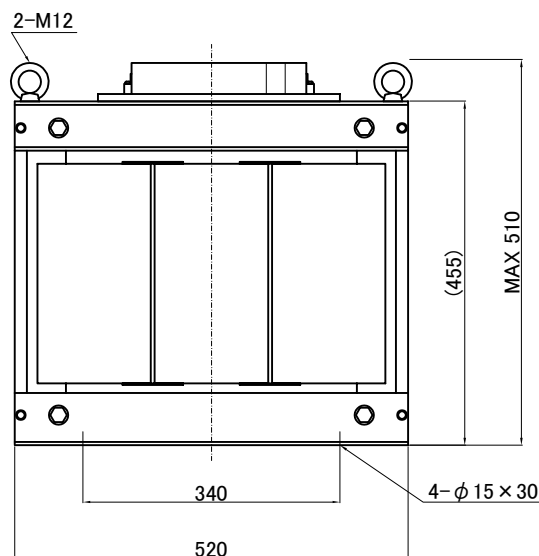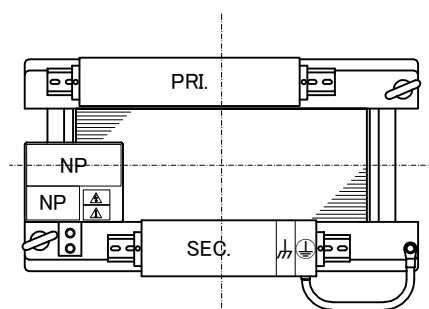

訂正記号 Rev. No.	訂正日 Date	訂正事項 Content	改訂 Ver.	訂正者 Designed	訂正記号 Rev. No.	訂正日 Date	訂正事項 Content	改訂 Ver.	訂正者 Designed
①	1301.24	Rewrite drawing	2	M.Fujitaka		21.07.01	Rewrite drawing	4	N.Marukai
②	1301.24	EN, IEC standard updated	2	M.Fujitaka	③	21.07.01	EN, IEC standard updated, BS standard added	4	N.Marukai
③	1904.16	Corrected the ambient temperature value(25℃→40℃)	3	M.Fujitaka					



今井電機株式会社

設計 DESIGNED DATE 13.01.24	品名 DESCRIPTION Dry type Isolating Transformer		摘要 REMARKS 質量は標準上仕様の値を記述しており、実測値と異なる場合もあります。	
DRAWN N.Marukai	尺度 SCALE	単位 UNIT mm	型名 MODEL IEH3-DYB0346S-843	
APPROVED S.Murakami	表面処理 FINISH		図番 DWG No SDYB0346S843	改訂 Ver. 4