

PRI.

U	380	400	415
---	-----	-----	-----

 Y

PRI	380	400	415
-----	-----	-----	-----

 W

	380	400	415
--	-----	-----	-----

SEC.

u	200	220	200
---	-----	-----	-----

 v

SEC	220	200
-----	-----	-----



 w

	200	220
--	-----	-----


 N

$\hbar$	$\odot$
---------	---------

PRI.	FPS(FP)-20	12P	M3.5	(0.8~1.4N·m)
SEC.	FPS(FP)-40	7P	M4	(1.2~1.8N·m)
	FPS(FP)-40	1P	M4	(1.2~1.8N·m)
	TFE20	1P	M3.5	(1.0~1.3N·m)

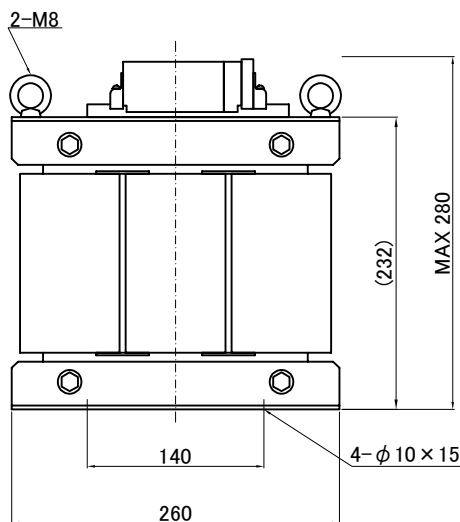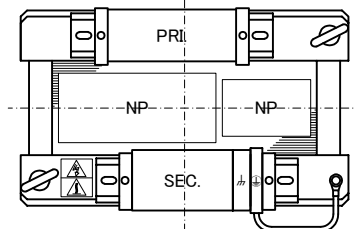

定格電圧 Rating	連続電流 Cont.	結線 Connection	Δ -Y ^N
容量 Capacity	1.73 kVA		
相数 Phase	3~	周波数 Frequency	50/60Hz
1次電圧 Primary Volt.	380/400/415V		
2次電圧 Secondary Volt.	200/220V		
2次電流 Secondary Curr.	5/4.54A		
絶縁抵抗 Insulation Resistance			
P-E P-S S-E	100M Ω Min. at DC500V		
絶縁耐圧 Dielectric Withstand Volt.			
P-E	AC 60Hz	4.0kV / 1min.	
P-S	AC 60Hz	5.0kV / 1min.	
S-E	AC 60Hz	2.5kV / 1min.	
トランス質量 Transformer Mass	30kg		
絶縁種別 Insulation Class	Class 180(H)		
定格周囲温度 Ambient Temp.	40℃		
適用規格 Standard	UL1561 C22.2 No. 47-M90 EN61558-1, EN61558-2-4 IEC61558-1, IEC61558-2-4 BS EN IEC 63000		
ULファイルNo. UL File No.	E258403		
EN, IECマーク EN, IEC Mark	Non short circuit proof isolating transformer		
推奨保護装置定格 Recommended protection device rating			
Pri. Circuit Breaker 5A Sec. Circuit Breaker 5A (IEC60947-2 or IEC60934)			

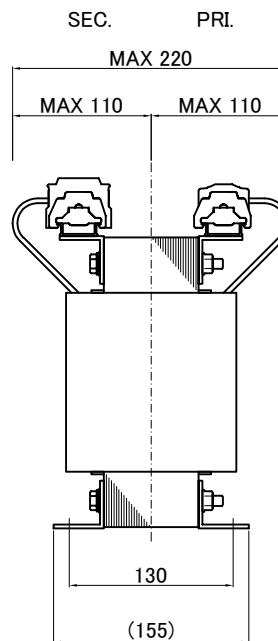

今井電機株式会社

SDYB1730S033

改訂
Ver. 5