

回路図
Circuit Diagram

The diagram illustrates a three-phase transformer with a star-delta connection. The primary (PRI.) is a star connection with phases U, V, and W, each having a 440V terminal. The secondary (SEC.) is a delta connection with phases u, v, and w, each having a 220V terminal. A neutral point N is shown on the right. The diagram includes a ground symbol at the bottom right.




PRI.

380	U	400	440	380	PRI	V	400	440	380	W	400	440	N
-----	---	-----	-----	-----	-----	---	-----	-----	-----	---	-----	-----	---

SEC.

u	200	220	v	SEC	200	220	w	200	220	$\frac{1}{2}$	$\frac{1}{2}$
---	-----	-----	---	-----	-----	-----	---	-----	-----	---------------	---------------

PRI.	FPS(FP)-40	10P	M4	(1.2~1.8N・m)
SEC.	FPS(FP)-40	9P	M4	(1.2~1.8N・m)
	FPS(FP)-40	1P	M4	(1.2~1.8N・m)
	TFE40	1P	M4	(1.4~1.8N・m)

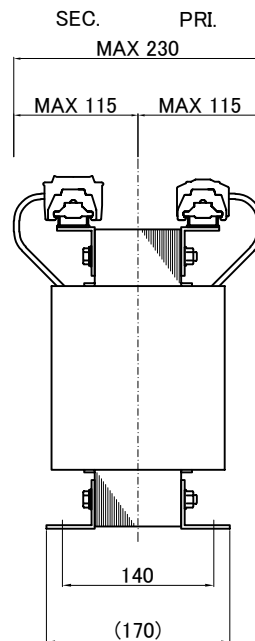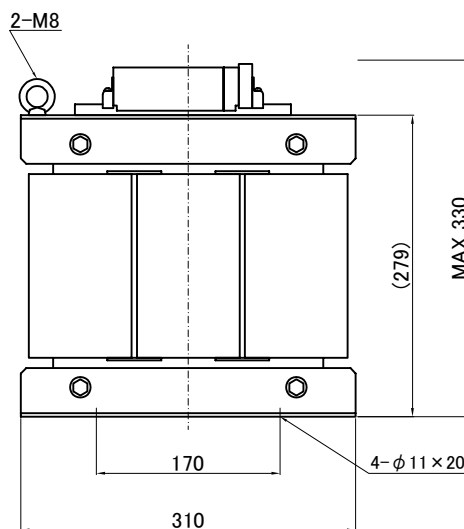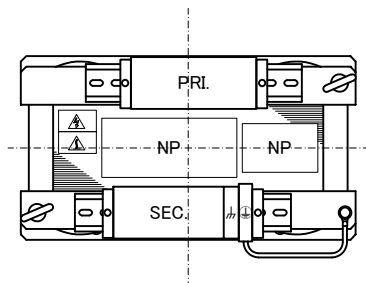

質量は標準仕様の値を記入しており、実測値と異なる場合もあります。

 IMAI ELECTRIC	設計 DESIGNED DATE 13.01.30	品名 DESCRIPTION Dry type Isolating Transformer		摘要 REMARKS	
	DRAWN M.Fujitaka	尺度 SCALE mm	単位 UNIT mm	型 名 MODEL	IEH3-YDB3460S-063
	APPROVED S.Murakami	表面処理 FINISH		図 番 DWG NO.	SYDB3460S063
今井電機株式会社					改訂 Ver. 5