

回路图
Circuit Diagram

The diagram illustrates a three-phase transformer with a star-delta connection. The primary (PRI) is a star connection with phases U, V, and W, each having a 380V/400V tap. The secondary (SEC.) is a delta connection with phases u, v, and w, each having a 200V/220V tap. A neutral point (N) is shown on the right.





PRI.

U	V	PR.	W	
380	400	380	400	N

SEC.

u	200	220	v	SEC	200	220	w	200	220	$\frac{1}{2}$	$\frac{1}{2}$
---	-----	-----	---	-----	-----	-----	---	-----	-----	---------------	---------------

PRI.	FPS(FP)-40	7P	M4	(1.2~1.8N・m)
SEC.	FPS(FP)-40	9P	M4	(1.2~1.8N・m)
	FPS(FP)-40	1P	M4	(1.2~1.8N・m)
	TFE40	1P	M4	(1.4~1.8N・m)

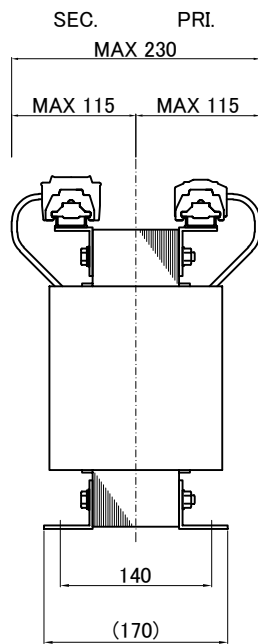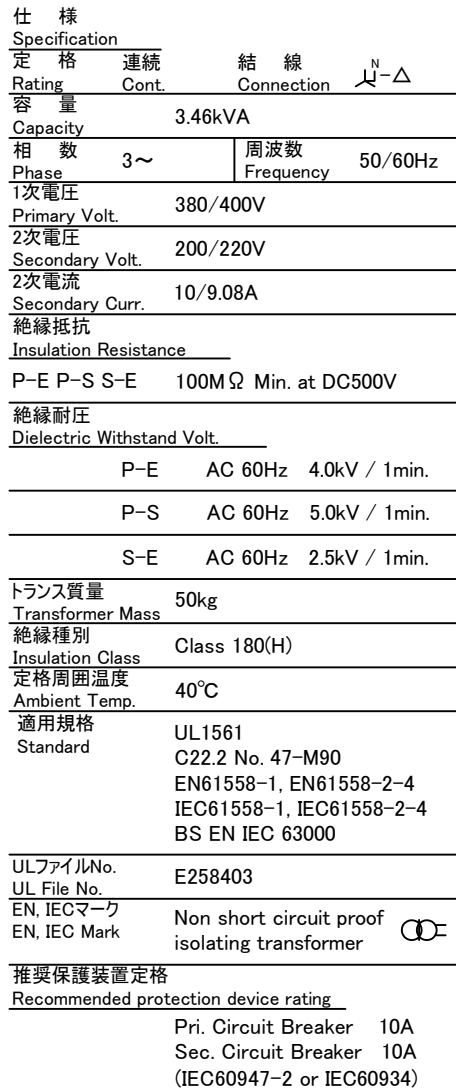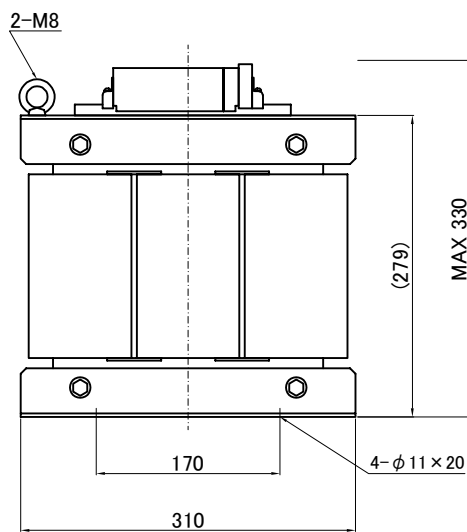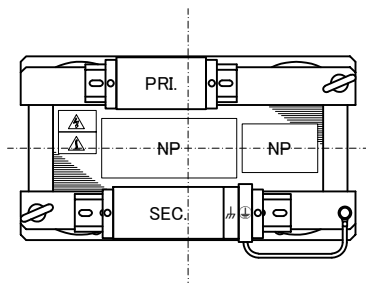

質量は標準仕様の値を記入しており、実測値と異なる場合もあります。

 今井電機株式会社	設計 DESIGNED	品名 DESCRIPTION		摘要 REMARKS
	DATE 13.01.30	Dry type Isolating Transformer		
	DRAWN	尺度 SCALE	単位 UNIT	型 名
	M.Fujitaka	mm	MODEL	IEH3-YDB3460S-303
	APPROVED	表面処理 FINISH	図 番	
	S.Murakami		DWG NO.	改訂 Ver. 5
				SYDB3460S303