
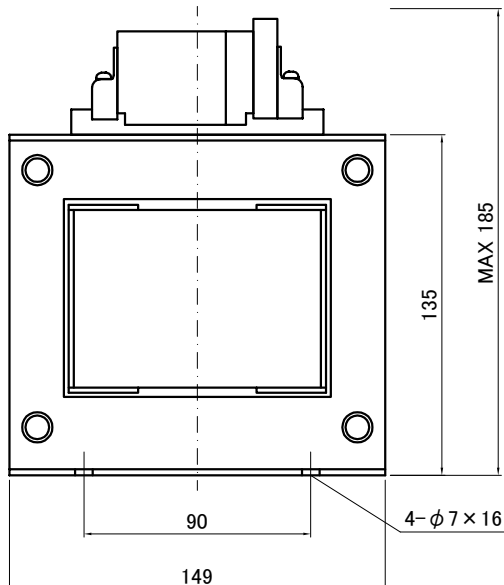



PRI.	P					
	0	200	208	220	230	240

SEC.	S						
	0	100	110	115	120	$\mathcal{M}$	

① TFE20 1P M3.5(1.0~1.3N·m)

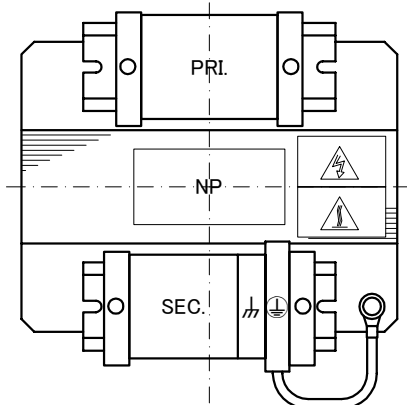

仕様 Specification			
定格 Rating	連続 Cont.		
容量 Capacity	300VA		
相数 Phase	1~	周波数 Frequency	50/60Hz
1次電圧 Primary Volt.	200/208/220/230/240V		
2次電圧 Secondary Volt.	100/110/115/120V		
2次電流 Secondary Curr.	3/2.73/2.61/2.5A		
絶縁抵抗 Insulation Resistance			
P-E P-S S-E	100MΩ Min. at DC500V		
絶縁耐圧 Dielectric Withstand Volt.			
P-E	AC 60Hz	2.5kV / 1min.	
P-S	AC 60Hz	4.2kV / 1min.	
S-E	AC 60Hz	2.5kV / 1min.	
トランス質量 Transformer Mass	7.5kg		
絶縁種別 Insulation Class	Class 130(B)		
定格周囲温度 Ambient Temp.	40°C		
適用規格 Standard	UL5085-1, UL5085-2 C22.2 EN61558-1, EN61558-2-4 IEC61558-1, IEC61558-2-4 BS EN IEC 63000		
ULファイルNo. UL File No.	E219074		
EN, IECマーク EN, IEC Mark	Non short circuit proof isolating transformer		
推奨保護装置定格 Recommended protection device rating	Pri. Circuit Breaker 3A Sec. Circuit Breaker 3A (IEC60947-2 or IEC60934)		

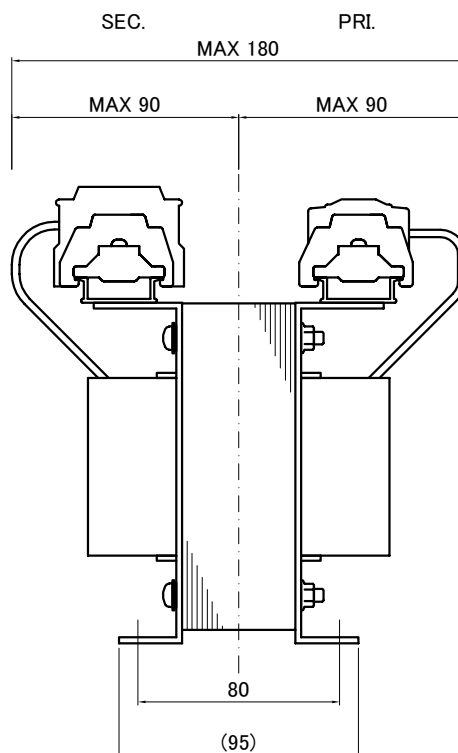

今井電機株式会社

APPROVED

表面处理	FINISH
------	--------

図 番

REMARKS

IEB1-A0300S-003

SIEB1A0300003

改訂 Ver.	1
------------	---