
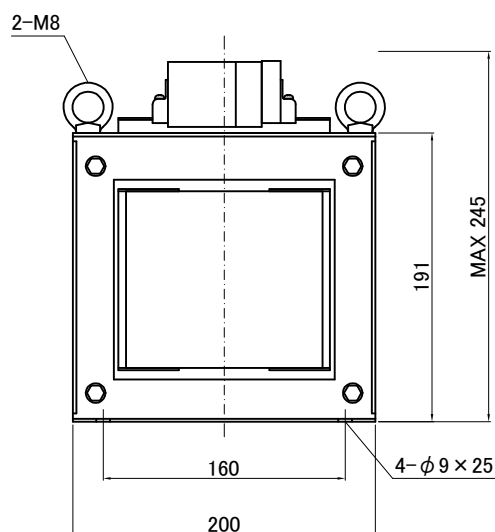


[illegible]


PRI.	P			
	0	200	208	220

SEC.	S				
	0	100	110	m	

① TFE40 1P M4 (1.4~1.8N·m)

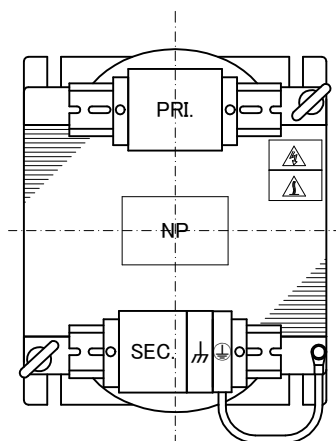

仕様 Specification			
定格 Rating	連続 Cont.		
容量 Capacity	3kVA		
相数 Phase	1~	周波数 Frequency	50/60Hz
1次電圧 Primary Volt.	200/208/220V		
2次電圧 Secondary Volt.	100/110V		
2次電流 Secondary Curr.	30/27.3A		
絶縁抵抗 Insulation Resistance			
P-E P-S S-E	100MΩ Min. at DC500V		
絶縁耐圧 Dielectric Withstand Volt.			
P-E	AC 60Hz	2.5kV / 1min.	
P-S	AC 60Hz	4.2kV / 1min.	
S-E	AC 60Hz	2.5kV / 1min.	
トランス質量 Transformer Mass	39kg		
絶縁種別 Insulation Class	Class 180(H)		
定格周囲温度 Ambient Temp.	40℃		
適用規格 Standard	UL5085-1, UL5085-2 C22.2 EN61558-1, EN61558-2-4 IEC61558-1, IEC61558-2-4 BS EN IEC 63000		
ULファイルNo. UL File No.	E219074		
EN, IECマーク EN, IEC Mark	Non short circuit proof isolating transformer		
推奨保護装置定格 Recommended protection device rating	Pri. Circuit Breaker 30A Sec. Circuit Breaker 30A (IEC60947-2 or IEC60934)		

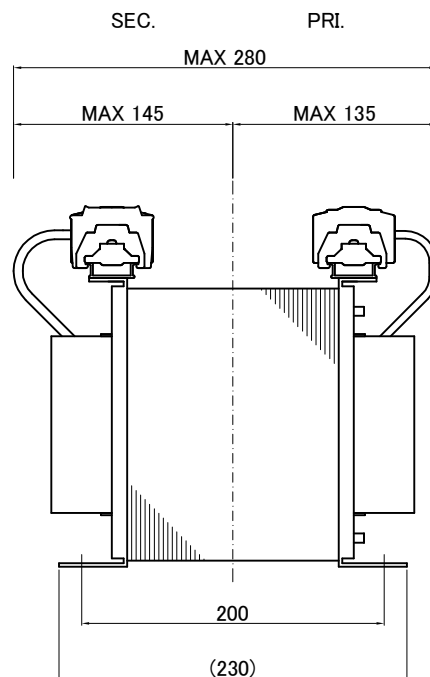

今井電機株式会社

APPROVED

表面处理	FINISH
------	--------

図 番

	c
--	---

SIEH1A3000653

改訂
Ver. 1