
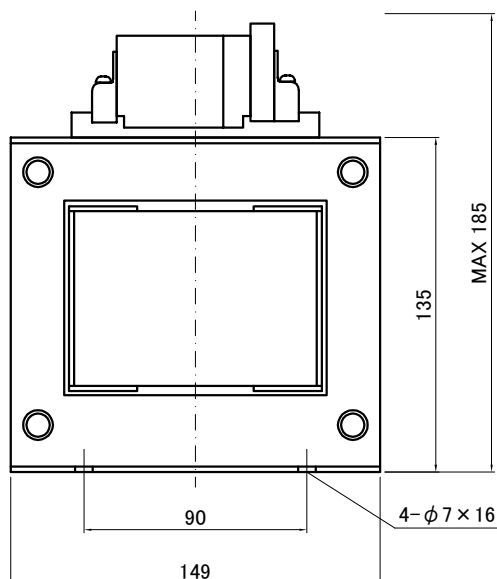



|      |   |     |     |     |
|------|---|-----|-----|-----|
| PRI. | P |     |     |     |
|      | 0 | 440 | 460 | 480 |

|      |   |     |     |     |     |          |                                                                                   |
|------|---|-----|-----|-----|-----|----------|-----------------------------------------------------------------------------------|
| SEC. | S |     |     |     |     |          |                                                                                   |
|      | 0 | 100 | 110 | 115 | 120 | $\nabla$ |  |

① TFE20 1P M3.5(1.0~1.3N·m)

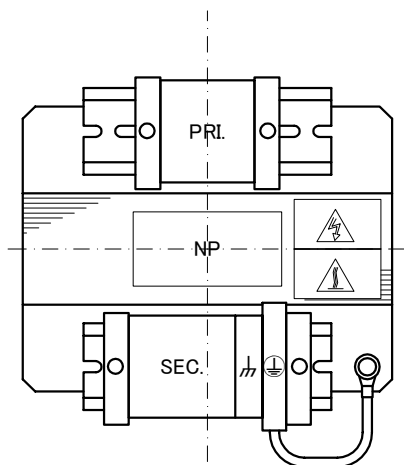

|                                                         |                                                                                                      |                  |         |
|---------------------------------------------------------|------------------------------------------------------------------------------------------------------|------------------|---------|
| 仕 様<br>Specification                                    |                                                                                                      |                  |         |
| 定 格<br>Rating                                           | 連続<br>Cont.                                                                                          |                  |         |
| 容 量<br>Capacity                                         | 300VA                                                                                                |                  |         |
| 相 数<br>Phase                                            | 1~                                                                                                   | 周波数<br>Frequency | 50/60Hz |
| 1次電圧<br>Primary Volt.                                   | 440/460/480V                                                                                         |                  |         |
| 2次電圧<br>Secondary Volt.                                 | 100/110/115/120V                                                                                     |                  |         |
| 2次電流<br>Secondary Curr.                                 | 3/2.73/2.61/2.5A                                                                                     |                  |         |
| 絶縁抵抗<br><u>Insulation Resistance</u>                    |                                                                                                      |                  |         |
| P-E P-S S-E                                             | 100MΩ Min. at DC500V                                                                                 |                  |         |
| 絶縁耐圧<br><u>Dielectric Withstand Volt.</u>               |                                                                                                      |                  |         |
| P-E                                                     | AC 60Hz                                                                                              | 4.0kV / 1min.    |         |
| P-S                                                     | AC 60Hz                                                                                              | 5.0kV / 1min.    |         |
| S-E                                                     | AC 60Hz                                                                                              | 2.5kV / 1min.    |         |
| トランス質量<br>Transformer Mass                              | 7.5kg                                                                                                |                  |         |
| 絶縁種別<br>Insulation Class                                | Class 130(B)                                                                                         |                  |         |
| 定格周囲温度<br>Ambient Temp.                                 | 40°C                                                                                                 |                  |         |
| 適用温度<br>Standard                                        | UL5085-1, UL5085-2<br>C22.2<br>EN61558-1, EN61558-2-4<br>IEC61558-1, IEC61558-2-4<br>BS EN IEC 63000 |                  |         |
| ULファイルNo.<br>UL File No.                                | E219074                                                                                              |                  |         |
| EN, IECマーク<br>EN, IEC Mark                              | Non short circuit proof<br>isolating transformer                                                     |                  |         |
| 推奨保護装置定格<br><u>Recommended protection device rating</u> | Pri. Circuit Breaker 2A<br>Sec. Circuit Breaker 3A<br>(IEC60947-2 or IEC60934)                       |                  |         |

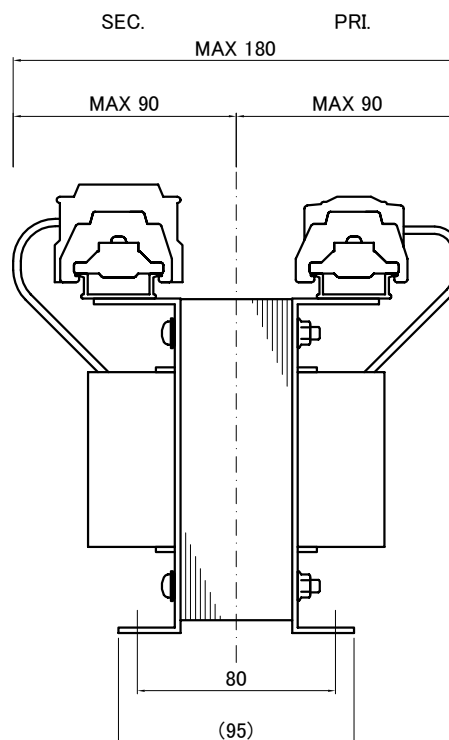

今井電機株式会社

APPROVED

|      |        |
|------|--------|
| 表面处理 | FINISH |
|------|--------|

図 番

10. **Other** \_\_\_\_\_

IEB1-B0300S-453

SIEB1B0300453

|            |   |
|------------|---|
| 改訂<br>Ver. | 1 |
|------------|---|